



Lighting Towers

LED TECHNOLOGY


# 480 sqm

Illuminated area



PIR MOTION  
SENSOR

Solar Line

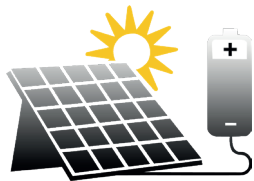
Operation:  
solar panel 200W  
power battery pack 1024 Wh

**X-POLE**  
SOLAR PRO  
2X30W LED - 8M

**T-ZERO<sup>PRO</sup>**

## X-POLE SOLAR PRO 2X30W LED - 8M

### T-ZERO PRO

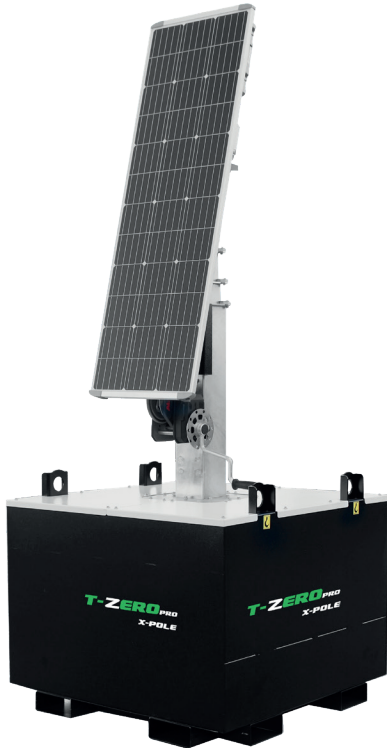

### FEATURES

- In house innovated controller that can regulate power output
- **Life P04 lithium-ion battery pack**
- High efficiency solar panel protected against all weather conditions
- High Luminous LED head complete with new light distribution lens design
- 5 sections manual vertical tower
- 8 m max height
- Galvanized metalworks
- 80 µm powder coating
- Forklift pockets for effective handling
- Strong base
- 4 x lifting eyes
- **PIR motion sensor as standard feature**

<b>ZERO emissions</b>	<b>ZERO fuel costs</b>	<b>ZERO noise</b>	<b>MINIMAL sevice</b>
<b>MONOCRYSTALLINE SOLAR MODULE</b>	<b>480 sqm illuminated area</b>	<b>PIR MOTION SENSOR</b>	<b>anti TYPHOON</b>
<b>24 units per truck</b>			

Dimensions & weight	Dimensions min (mm)		Dimensions max(mm)		Total weight (kg)
	1100x1105x2390 (LxWxH)		1100x1105x8000 (LxWxH)		410
Floodlights	Type	Power (each)	Floodlights number	IP level	Illuminated area (sqm)
	Led	30W	2	65	480
Mast	Lifting method		Max Height	Max Wind Speed	
	Manual		8 m	80 km/h	
Batteries	Type	Batteries number	Power Battery pack	Expected battery cycle	
	LITHIUM	2	1024 Wh	2000	
Solar panel	Power (each)	Running time with solar mode	Min. working full bright	Min. working dim mode	
	200W		15 h	58 h	