

# TKS-120 SKID


water  
nebulizer  
**110-120 m**




## R.O.T. SYSTEM



Remote control, 50m range programmable function "cicle"  
to start electricmotor-water pump - oscillation with only one button




Automatic oscillation 0 - 340°  
manual area setting



Electric  
Tilting System

# TKS-120 SKID

water  
nebulizer  
**110-120 m**

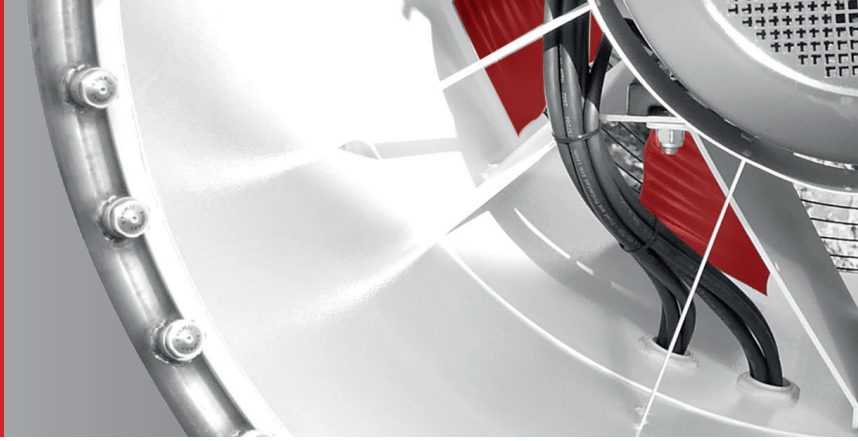

## R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electricmotor-water pump – oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

## FEATURE

- SMART START SYSTEM
- Emergency stop button
- Separate electric cabinet
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Lifting eye
- Stainless steel crowns with 72 nozzles
- Automatic Water drain system
- Mounted on base with forklift pockets

## SAFETY

- Reduce dust for healty and safe enviroment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
  - start/stop
  - tilt up/down
  - turn left/right/auto

## OPTIONS

- 60 Hz
- External pump for chemicals additives

- Stainless steel crown with 72 NOZZLES




- Galvanized Skid base with forklift pockets

### technical data

|                           |     |   |
|---------------------------|-----|---|
| Electric engine power     | kW  | <b>108</b>                                |
| Water consumption         | l/m | <b>145 -160</b>                           |
| Coverage (without wind)   | m   | <b>110 - 120</b>                          |
| Max. water throw height   | m   | <b>40</b>                                 |
| Water connection          | -   | <b>UNI 45<br/>or STORZ<br/>or CAMLOCK</b> |
| Min. inlet Water pressure | bar | <b>1,0</b>                                |

### technical data

|                         |      |                       |
|-------------------------|------|-----------------------|
| Water inlet filter      | Mesh | <b>60</b>             |
| Y Filter                | µm   | <b>500</b>            |
| Electric tilting system | -    | <b>0 - 35°</b>        |
| Automatic oscillation   | -    | <b>0 - 340°</b>       |
| Dimensions              | mm   | <b>2480x2180x2470</b> |
| Weight                  | Kg   | <b>2990</b>           |

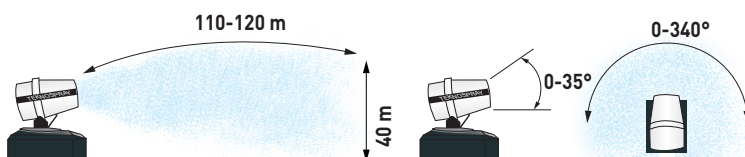

**TRIME**<sup>®</sup>  
Dust Suppression

Sales Dept. +39 0382 406 252  
www.trime.it - info@trime.it

The company reserves the right to modify the technical specifications, items and design without notice.  
The images of the products are indicative for illustrative purposes only.