



TKS-40

HYDRAULIC DRIVEN

water
nebulizer
30-40 m




12 kVA
Generator required


R.O.T. SYSTEM



Remote control, 50m range programmable function "cicle"
to start electricmotor-water pump – oscillation with only one button



Automatic oscillation 0 - 340°
manual area setting




Electric
Tilting System

TKS-40

HYDRAULIC DRIVEN

water
nebulizer
30-40 m

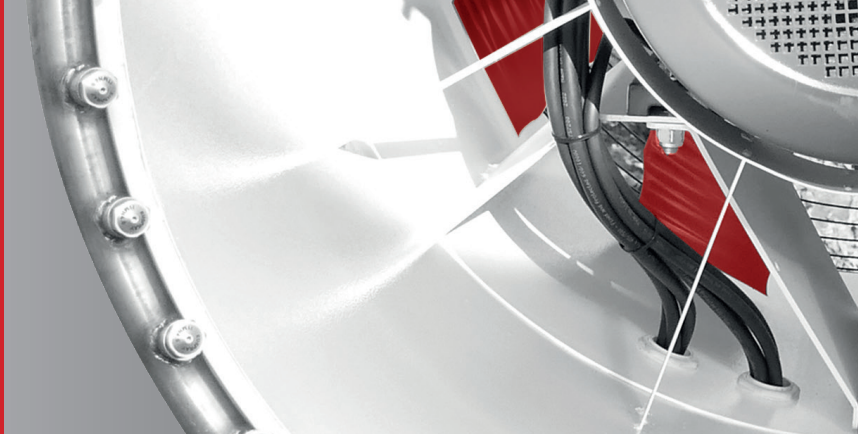

R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electricmotor-water pump – oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

FEATURE


- Integrated control panel
- Hydraulic generator (included)
- SMART START SYSTEM
- Emergency stop button
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Central lifting eye
- Stainless steel crown with 24 nozzles
- Skid base with forklift pockets

SAFETY

- Reduce dust for healthy and safe enviroment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto


OPTIONS

- 60 Hz
- External pump for chemicals additives
- 2000 lt water tank with pump on skid
- 2000 lt water tank with pump on site tow trailer
- Reel winder for water pipe

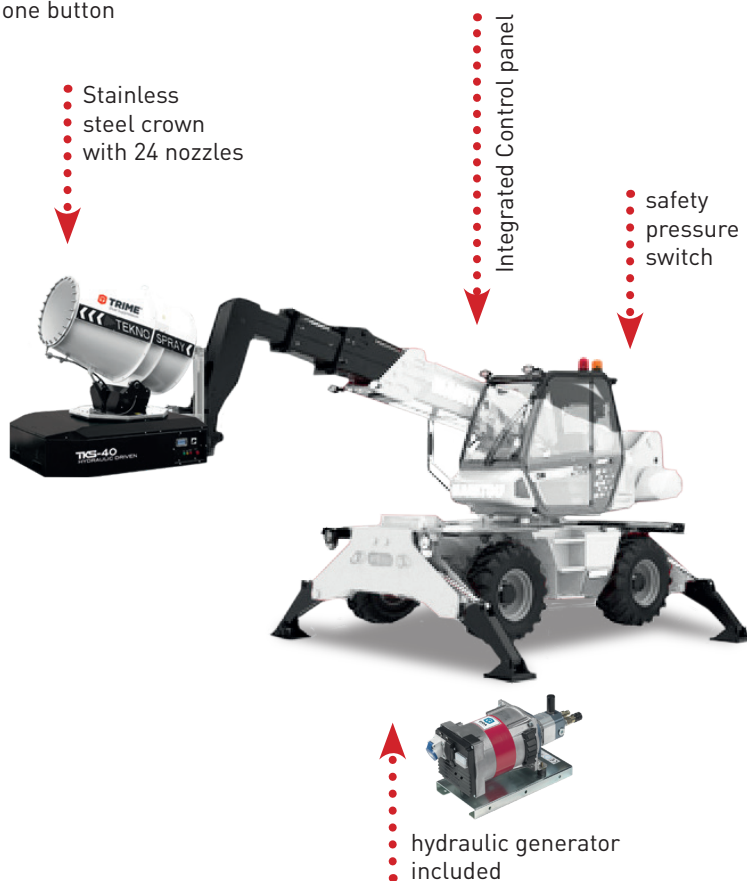

technical data		
Electric engine power	kW	7,5
Fan diameter	mm	900
Water consumption	l/h	37 -43
Coverage (without wind)	m	30 - 40
Max. water throw height	m	10
Water connection	-	UNI 45 or STORZ or CAMLOCK
Min. inlet Water pressure	bar	1,0
Water inlet filter	mesh	60

technical data		
Y Filter	µm	60
Electric Tilting system	-	500
Automatic oscillation	-	0 - 35°
Dimensions	mm	0 - 340°
Weight	Kg	850
Hydraulic generator included	kVA	12
Secondary Hydraulic circuit	-	40l - 140/150 bar

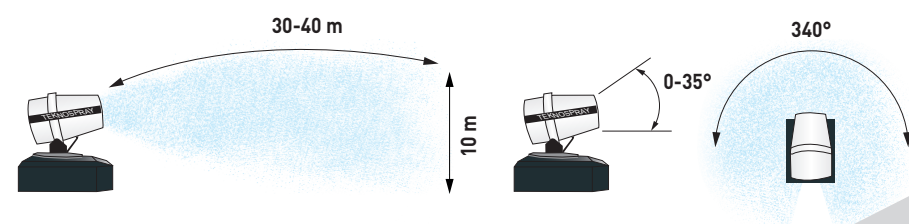

TRIME[®]
Dust Suppression

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it