

TKS-40

MONSTER

water
nebulizer
30-40 m




9 kVA

Generator required


R.O.T. SYSTEM



Remote control, 50m range programmable function "cicle"
to start electricmotor-water pump – oscillation with only one button




Automatic oscillation 0 - 340°
manual area setting



Electric
Tilting System

TKS-40 MONSTER

water
nebulizer
30-40 m

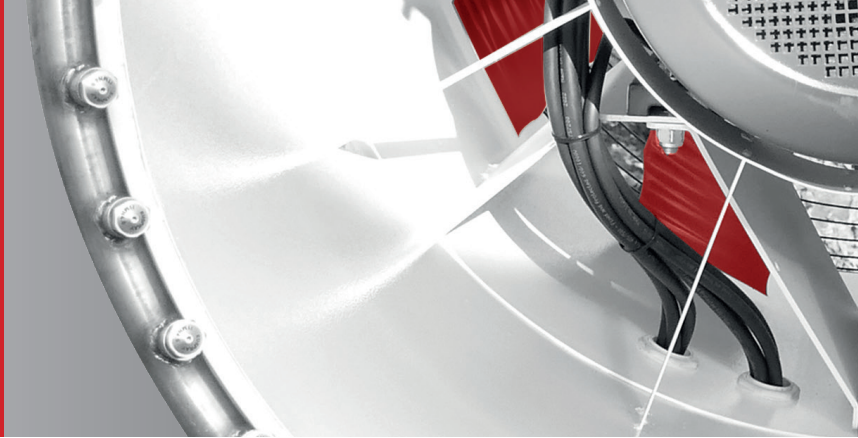

R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electric motor-water pump – oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

FEATURE

- SMART START SYSTEM
- Water pump
- Water pressure Gauge
- Water pump
- Water Safety pressure switch
- Manual water drain system
- Integrated water tank
- Stainless steel crown with 24 nozzles
- Multi-directionally electric adjustable cannon
- 10 meters hydraulic and foldable mast
- Robust lifting eyes
- Cable protected inside the mast with automatic reel
- Circuit breaker for electrical protection
- High efficiency Kubota engine coupled with heavy duty Linz Electric alternator
- Wide crawler undercarriage to be secure and stable in any situation
- Constantly horizontal thanks to the dynamic levelling technology
- Integrated drive system with WI-FI remote console

OPTIONS


- 60 Hz
- External pump for chemicals additives

SAFETY


- Reduce dust for healthy and safe environment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto



integrated drive system
with wi-fi remote console



wide crawler undercarriage
to be secure and stable
in any situation




Longitudinal/Lateral
Automatic levelling $\pm 15^\circ$

technical data		
Electric engine power	kW	5
Fan diameter	mm	800
Water consumption	l/h	37 - 43
Coverage (without wind)	m	30 - 40
Max. water throw height	m	20
Water connection	-	UNI 45 or STORZ or CAMLOCK
Water inlet filter	mesh	60

technical data		
Y Filter	μm	500
Electric Tilting system	-	0 - 35°
Automatic oscillation	-	0 - 340°
Dimensions	mm	4800x1830x2600
Tower height	m	10
Engine (diesel)	-	Kubota D1105
Weight	Kg	2525

generator		
Fuel tank	kWA	150
Consumption	l/h	2
Running time	hrs	75
Power generator	kVA	9
Voltage	VDC	48
Max driving speed	km/h	2,2
Gross weight	Kg	3500

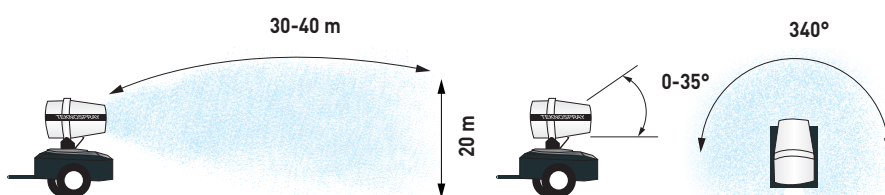

TRIME[®]
Dust Suppression

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.