

TKS-50

water
nebulizer
40-50 m




20 kVA

Generator required


R.O.T. SYSTEM



Remote control, 50m range programmable function "cycle"
to start electricmotor-water pump – oscillation with only one button



Automatic oscillation 0 - 340°
manual area setting



Electric
Tilting System

TKS-50

water
nebulizer
40-50 m



R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electricmotor-water pump – oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

FEATURE

- Integrated control panel
- SMART START SYSTEM
- Emergency stop button
- Phase inverter
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Manual water drain system
- Central lifting eye
- Forklift pockets
- Stainless steel crown with 24 nozzles
- 3 height adjustable stabilizers
- Equipped with big size wheels for off-road site

SAFETY

- Reduce dust for healty and safe enviroment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto


OPTIONS

- 60 Hz
- External pump for chemicals additives
- Front jockey wheel



technical data		
Electric engine power	kW	15
Inlet plug	-	400V3P+N+T 50Hz 32A
Fan diameter	mm	900
Water consumption	l/m	37 - 43
Coverage (without wind)	m	40 - 50
Max. water throw height	m	15
Water connection	-	UNI 45 or STORZ or CAMLOCK
Min. inlet Water pressure	bar	1.0

technical data		
Generator required	kVA	20
Water inlet filter	Mesh	60
Y Filter	µm	500
Electric tilting system	-	0 - 35°
Automatic oscillation	-	0 - 340°
Dimensions min	mm	2077x1836x2230
Dimensions max	mm	2877x1836x2230
Weight	Kg	840

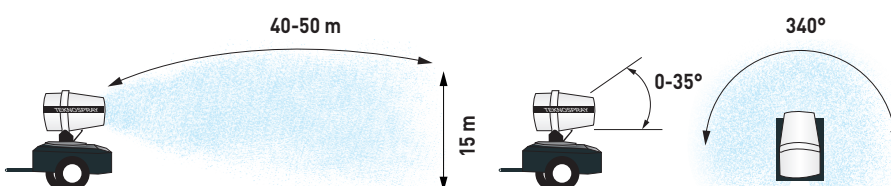

TRIME[®]
Dust Suppression

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it