

TKS-80 SKID

water
nebulizer
70-80 m




90 kVA

Generator required


R.O.T. SYSTEM



Remote control, 50m range programmable function "cicle" to start electricmotor-water pump - oscillation with only one button



Automatic oscillation 0 - 340°
manual area setting




Electric
Tilting System

TKS-80

SKID

water nebulizer

70-80 m

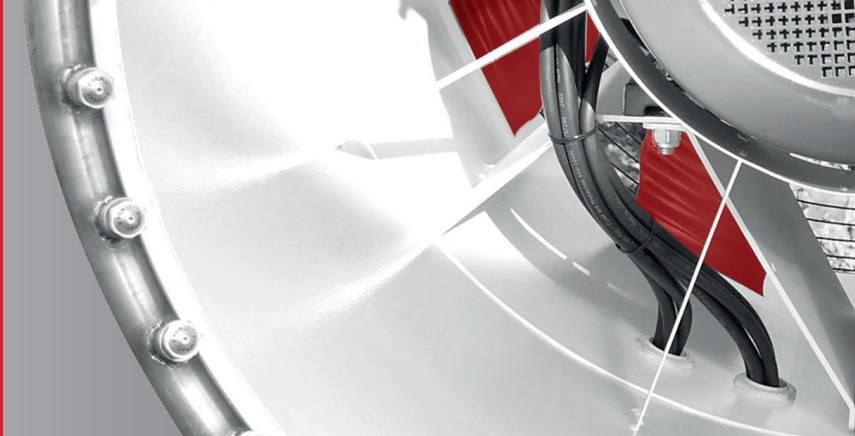

R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electricmotor-water pump – oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

FEATURE

- Integrated control panel
- Smart start system
- Emergency stop button
- Separate cabinet
- Water pump 4kW
- Water pressure gauge
- Water safety pressure switch
- Manual water drain system
- Lifting eye
- Forklift pockets
- Stainless steel crown with 36 nozzles
- Galvanized SKID base with forklift pockets

SAFETY

- Reduce dust for healthy and safe environment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto


OPTIONS

- 60 Hz
- External pump for chemicals additives



technical data		
Electric engine power	kW	45
Inlet plug	-	400V+N+T 50Hz 125A
Fan diameter	mm	1050
Water consumption	l/m	115 - 130
Coverage	m	(still wind conditions)
Max. water throw height	m	30
Water connection	-	UNI 45 or STORZ or CAMLOCK
Min. inlet Water pressure	bar	1.0

technical data		
Generator required	kVA	90
Water inlet filter	Mesh	60
Y Filter	µm	500
Electric tilting system	-	0 - 35°
Automatic oscillation (working angle settable manually)	-	0 - 340° manual area setting
Dimensions	mm	2238x1493x2389
Weight	Kg	1460

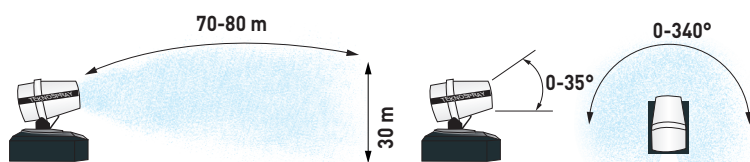

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it